SCHEMATIC OF THE HEATHKIT® CROSSFIRE MODEL HD-3006

NOTES:

1. ALL RESISTORS ARE IN OHMS (K=1,000), ALL RESISTORS ARE 1/4-WATT, 5%.
2. ALL CAPACITOR VALUES ARE IN µF (MICROFARADS).
3. REFER TO THE CIRCUIT BOARD X-RAY VIEW FOR THE PHYSICAL LOCATION OF PARTS.
4. VOLTAGES TAKEN WITH NO SIGNAL INPUT.

LEGEND:
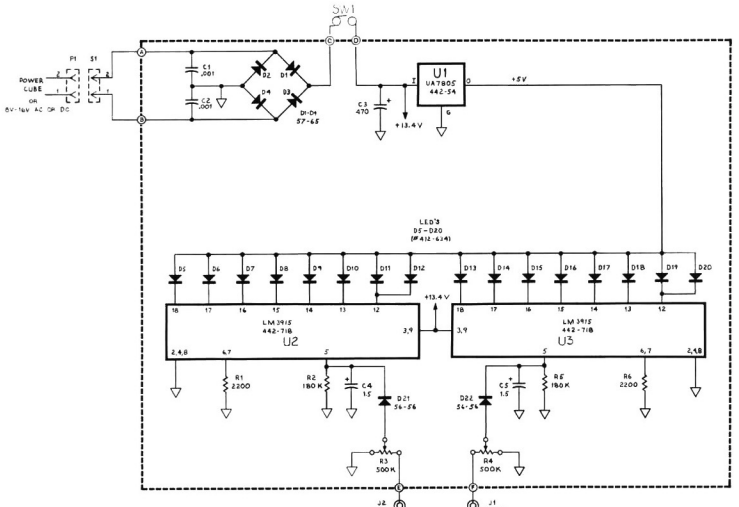
1. ▽ CIRCUIT BOARD GROUND
2. ⟶ MALE CONNECTOR
3. —≺ FEMALE CONNECTOR
4. —•— CONNECTION
5. ○ CONNECTION TO CIRCUIT BOARD