


22. SCHEMATIC DIAGRAM



- NOTE (1) ALL RESISTANCE VALUES ARE INDICATED IN "OHM" (K=10³ OHM, M=10⁶ OHM)
 (2) ALL CAPACITANCE VALUES ARE INDICATED IN "μF" (P=10⁻⁶ μF)
 (3) ● MAY VARY FROM UNIT TO UNIT FOR BEST PERFORMANCE
 (4) ✱ FOR AUSTRALIAN MODELS ONLY

23. EXPLODED VIEW

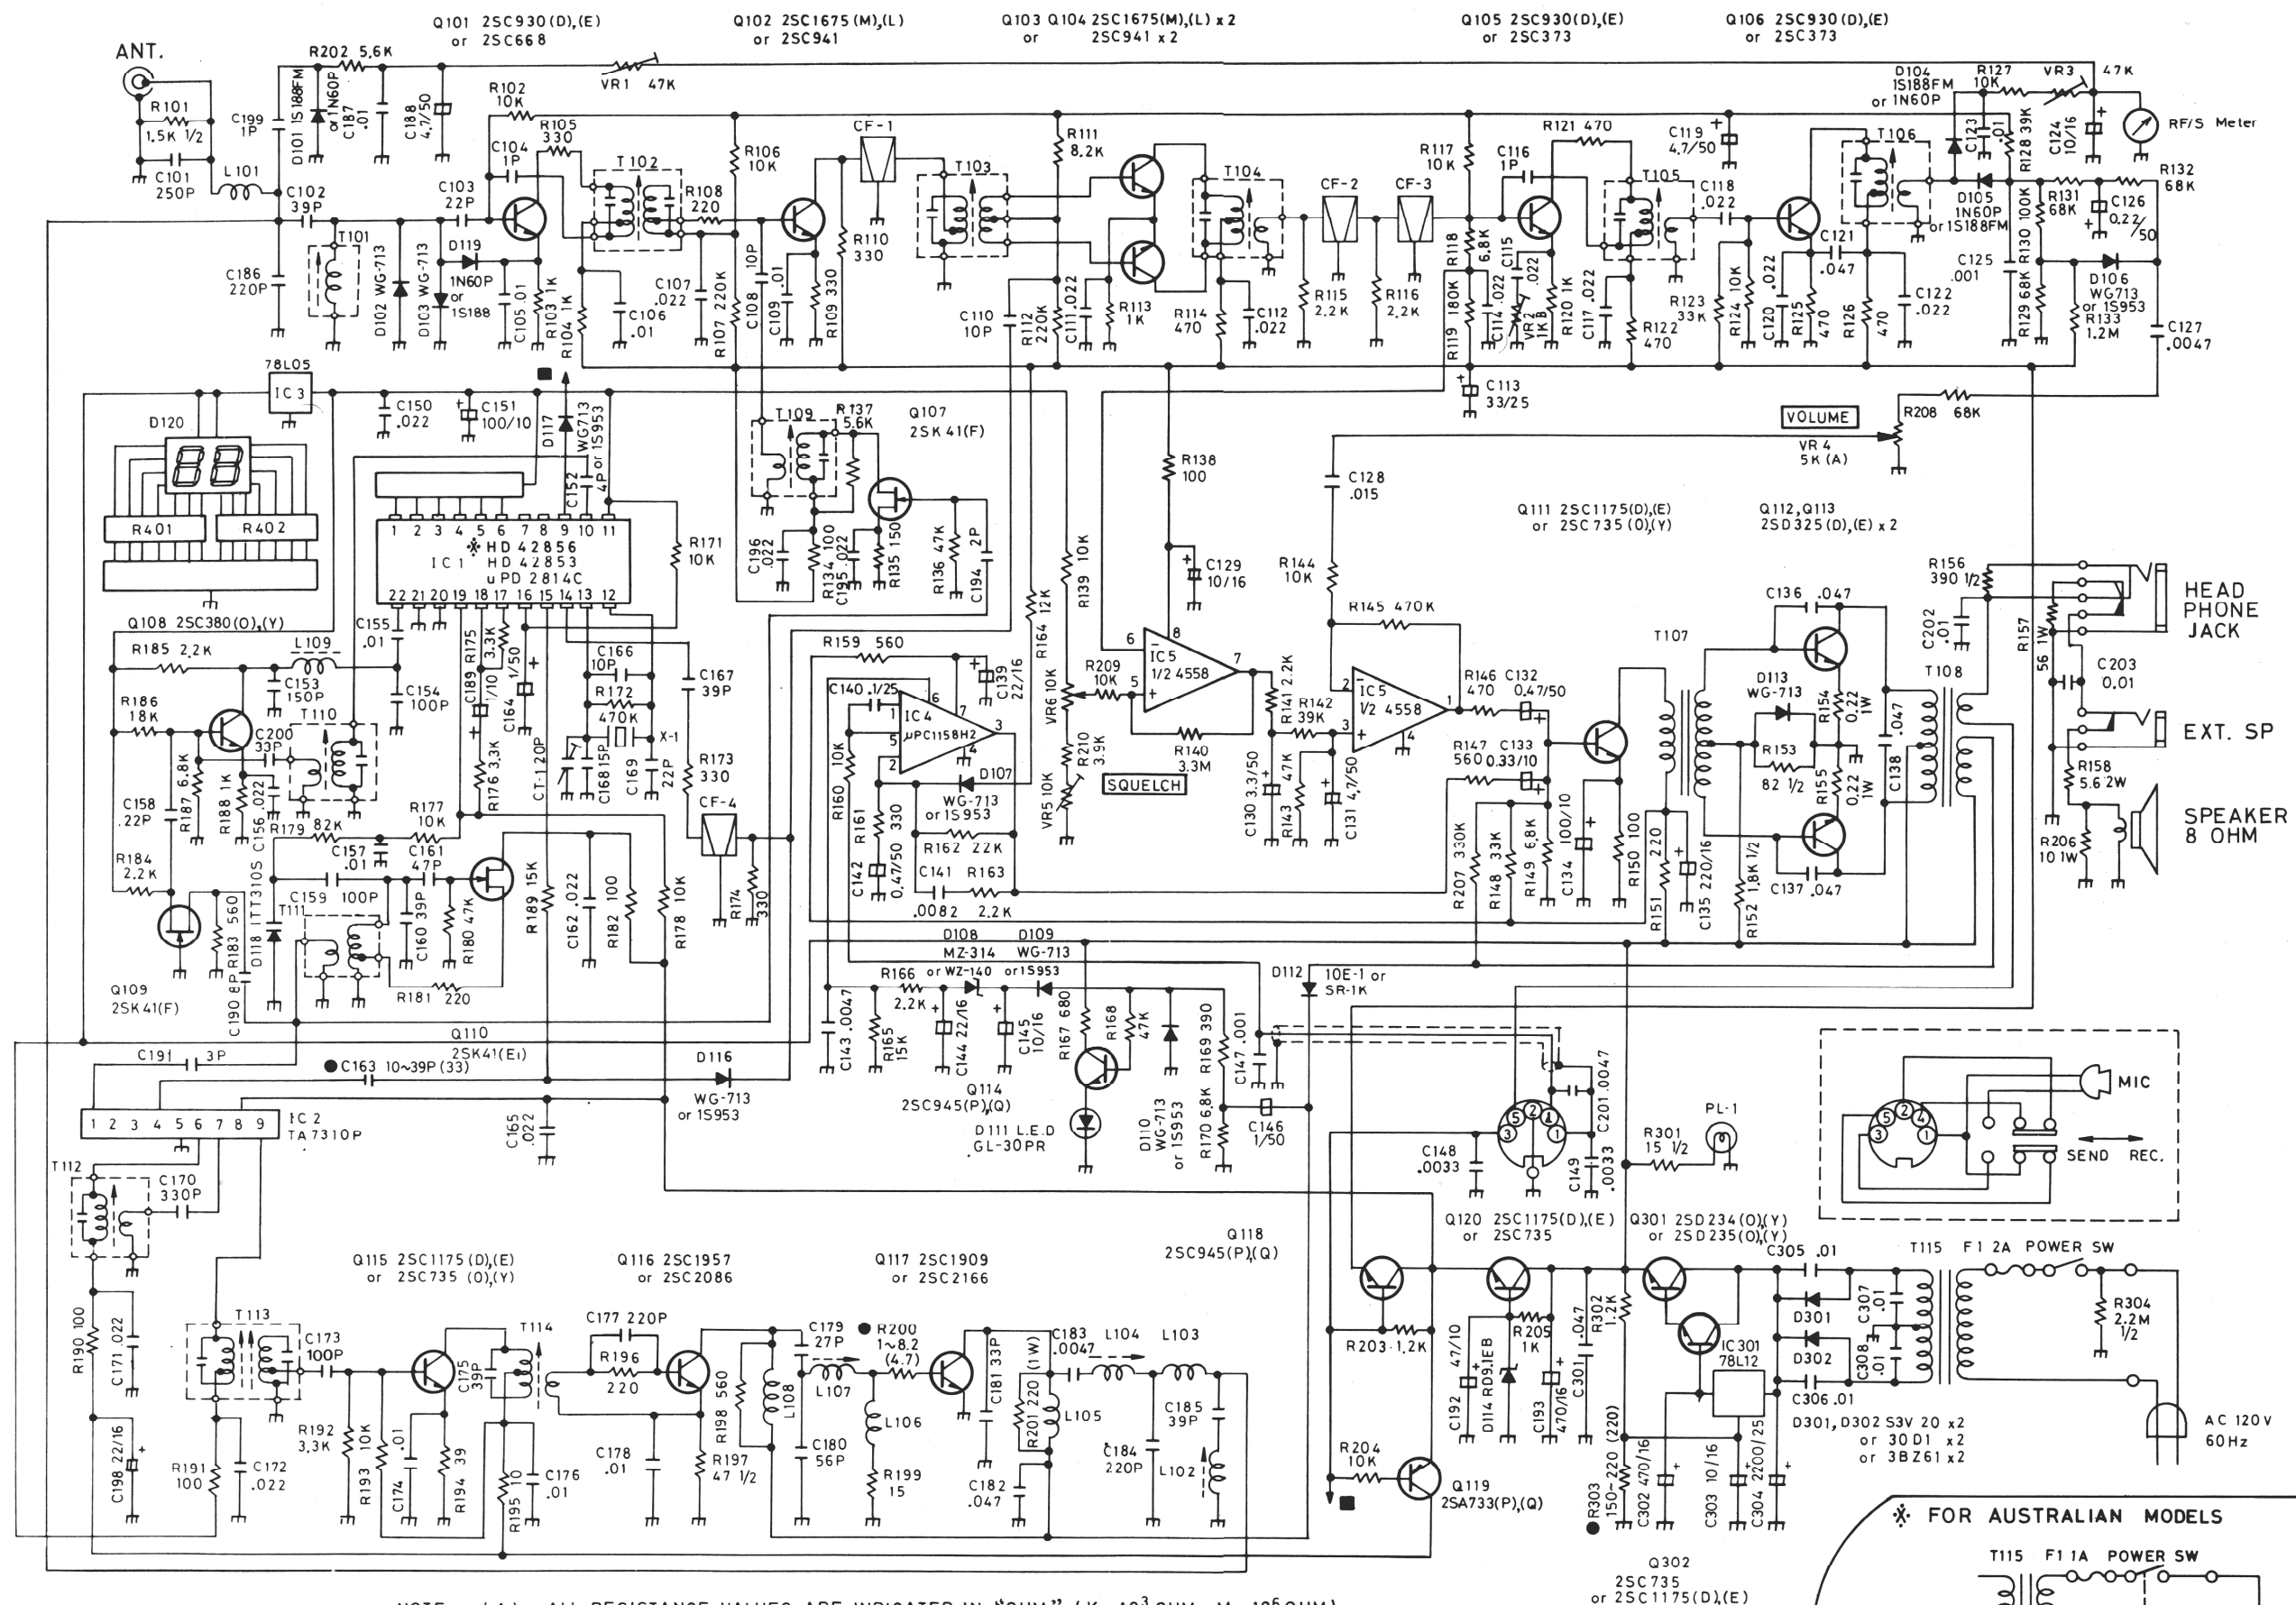